



IT Series, IP65



IT120R024



IT120R024Z

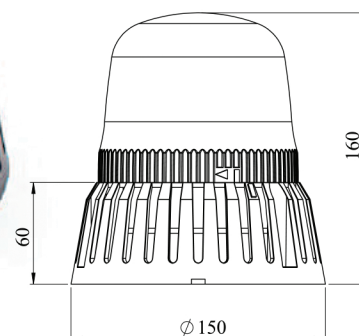

Beacon

General Specification;

- Fireproof plastic body
- Polycarbonate lens
- Base and wall-mount
- Unaffected by water, dust, heat and UV.
- Wear-free due to the absence of moving components
- Long life
- Melody and Silent mode. (for Buzzer models)
- 7 LED modes
- IP 65 rating

Technical Specification;

- Operating Voltage: 12-24V AC/DC, 48-110- 220V AC,
- Current consumption: 3,4W (at 24 V DC by rotating mode)
- Operating temperature: -20 / +50 C°
- Storage temperature: -20 / +70 C°
- 105dB Buzzer

Modes

- Rotation 100 RPM :
- Rotation 160 RPM :
- Single Blink
- 3 Blink
- 6 Blink
- Right-Left Blink
- Blinker



IT070R024Z

| Code | Light | Colour | Features | Voltage | Box/Pcs |
|-------------|-------|--------|---------------|---------------|---------|
| IT070R024 Z | Led | R | With Buzzer | 12-24V AC/DC | 1 |
| IT070R240 Z | Led | R | With Buzzer | 48-240V AC/DC | 1 |
| IT070Y024 Z | Led | Y | With Buzzer | 12-24V AC/DC | 1 |
| IT070Y240 Z | Led | Y | With Buzzer | 48-240V AC/DC | 1 |
| IT070G024 Z | Led | G | With Buzzer | 12-24V AC/DC | 1 |
| IT070G240 Z | Led | G | With Buzzer | 48-240V AC/DC | 1 |
| IT070R024 C | Led | R | Buzzer Enable | 12-24V AC/DC | 1 |
| IT070R230 C | Led | R | Buzzer Enable | 230V AC | 1 |
| IT120R024 | Led | R | | 12-24V AC/DC | 1 |
| IT120R024 Z | Led | R | With Buzzer | 12-24V AC/DC | 1 |
| IT120R048 | Led | R | | 48V AC | 1 |
| IT120R220 | Led | R | | 110-220V AC | 1 |
| IT120R220 Z | Led | R | With Buzzer | 110-220V AC | 1 |
| IT120Y024 | Led | Y | | 12-24V AC/DC | 1 |
| IT120Y024 Z | Led | Y | With Buzzer | 12-24V AC/DC | 1 |
| IT120Y048 | Led | Y | | 48V AC | 1 |
| IT120Y220 | Led | Y | | 110-220V AC | 1 |
| IT120Y220 Z | Led | Y | With Buzzer | 110-220V AC | 1 |
| IT120G024 | Led | G | | 12-24V AC/DC | 1 |
| IT120G024 Z | Led | G | With Buzzer | 12-24V AC/DC | 1 |
| IT120G048 | Led | G | | 48V AC | 1 |
| IT120G220 | Led | G | | 110-220V AC | 1 |
| IT120G220 Z | Led | G | With Buzzer | 110-220V | 1 |

Note: Please add "C" letter at the end of the code in order to have buzzer as optional for *IT070 type beacons.