SPRING CLAMP CX Series

E220514 60947-7-1


SPRING (CAGE) TERMINAL BLOCKS



- Quick & easy installation
- Top wire entry
- Versatile and vibration proof
- Fail-proof, safe connection
- NO torque requirements
- Maintenance free - no need to re-tighten


WATCH VIDEO

CX SERIES FEATURES AND SELLING POINTS

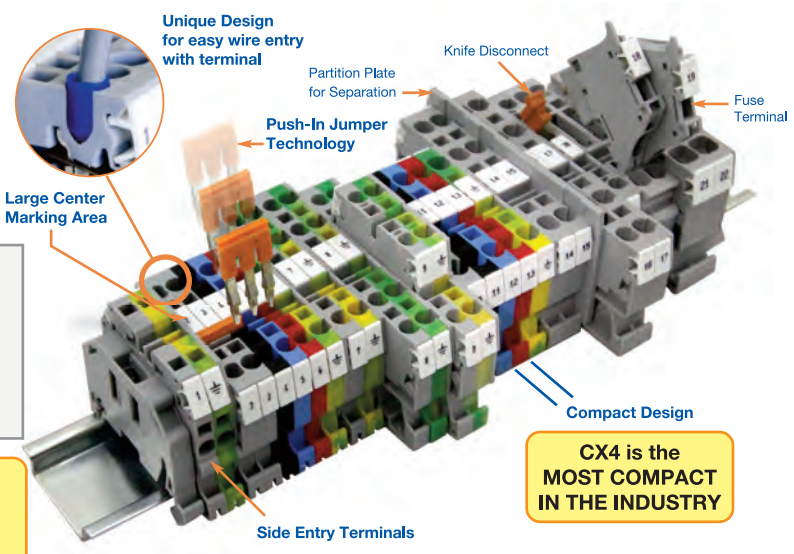

CX4 is the MOST COMPACT IN THE INDUSTRY

EASY TO INSTALL

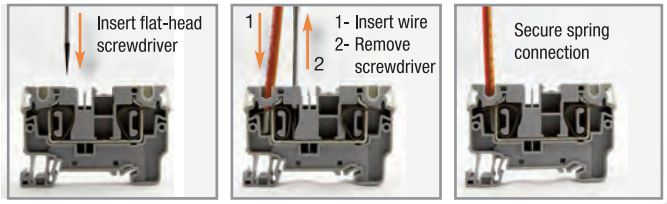


APPLICATIONS / INDUSTRIES

- **Transportation**
- **Escalators / elevators**
- **Machinery**
- **Vehicles**
- **"Moving" high vibration applications**

MANUFACTURES ALTECH CROSSES (PLUS OTHERS)

Phoenix	ST Series
Wago	2000 (Topjob Series)
	280 Series
ABB	SNK Series
Allen Bradley	1492-L Series
Automation Direct	DINnector Series
Weidmüller	Z Series

Push-In Jumper Technology

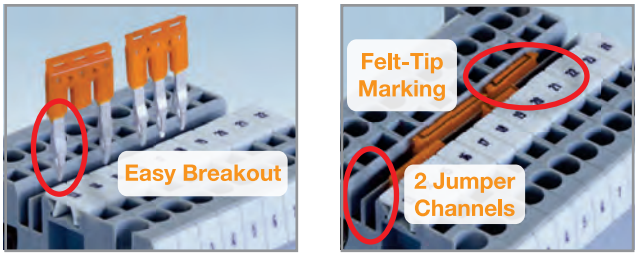

Feed-Thru Terminal



Part No.	Wires	Current	Wire Size	Voltage	W (mm)
CX2.5	2	20A	24-12AWG	600V	5
CX4	2	30A	24-10AWG	600V	6
CX6	2	50A	24-8AWG	600V	8
CX10	2	65A	24-6AWG	600V	10
CX2.5/3	3	20A	24-12AWG	600V	5
CX2.5/4	4	20A	24-12AWG	600V	5
CX4/3	3	30A	24-10AWG	600V	6
CX4/4	4	30A	24-10AWG	600V	6
CX6/3	3	50A	24-8AWG	600V	8
CX10/3	3	65A	24-6AWG	600V	10




Ground Terminals



Part No.	Wires	Current	Wire Size	Voltage	W (mm)
CXG2.5	2	-	24-12AWG	600V	5
CXG4	2	-	24-10AWG	600V	6
CXG6	2	-	24-8AWG	600V	8
CXG10	2	-	24-6AWG	600V	10
CXG2.5/3	3	-	24-12AWG	600V	5
CXG2.5/4	4	-	24-12AWG	600V	5
CXG4/3	3	-	24-10AWG	600V	6
CXG4/4	4	-	24-10AWG	600V	6
CXG6/3	3	-	24-8AWG	600V	8
CXG10/3	3	-	24-6AWG	600V	10

Double Level Terminals



Part No.	Levels	Current	Wire Size	Voltage	W (mm)
CXDL2.5	2	20A	24-12AWG	600V	5
CXDL2.5(I.S)	2, Shorted	20A	24-12AWG	600V	5
CXDLG2.5	2, Bottom Ground	20A	24-12AWG	600V	5
CXDLG2.5(I.S)	2, Ground	20A	24-12AWG	600V	5

Fuse Terminals



Part No.	Fuse Type	Current	Wire Size	Voltage	W (mm)
CXF4	5x20mm	10A	24-10AWG	600V	6
CXF4(L)6-60V	5x20mm, LED	10A	24-10AWG	600V	6
CXF4(L)110-240V	5x20mm, LED	10A	24-10AWG	600V	6

Disconnect Terminals



Part No.	Wires	Current	Wire Size	Voltage	W (mm)
CXK2.5	2	16A	24-12AWG	600V	5
CXK2.5/4	4	16A	24-12AWG	600V	5
CXK4	2	22A	24-10AWG	600V	6

Side Entry Terminals



Part No.	Wires	Current	Wire Size	Voltage	W (mm)
CXS2.5	2	20A	24-12AWG	600V	5
CXS4	2	30A	24-10AWG	600V	6